

Mikrotik Stup

Hosting Internal server

IP > Firewall > NAT : We can specify our own server for external access.

- 8181 - This is to MAC mini server Time log and mSupply registration page.
- 5900 -- This is to MAC mini screenshare
- 9100 -- This is to the label printer 192.168.3.246 for Moneyworks staff to do some label printing

NAT list

#	Action	Chain	Src. Address	Dst. Address	Prot.	Src. Port	Dst. Port	Any. Port	In. Interface	Out. Interface	In. Interface List	Out. Interface List	Src. Address List	Dst. Address List	Bytes	Packets
1	dst-nat	dstnat			6 (tcp)		8181		ether1						3645.1 KiB	63 356
2	dst-nat	dstnat			6 (tcp)		5900		ether1						49.9 MiB	875 359
3	dst-nat	dstnat			6 (tcp)		9100		ether1						172.3 KiB	3 172
4	dst-nat	dstnat			6 (tcp)		3905		ether1						0 B	0
5	dst-nat	dstnat			6 (tcp)		8282		ether1						0 B	0
6	dst-nat	dstnat			6 (tcp)		3900		ether1						374.9 KiB	8 967

Setting for port 8181

NAT Rule

Enabled ☒

Chain: **dstnat**

Src. Address:

Dst. Address:

Protocol: **6 (tcp)**

Src. Port:

Dst. Port: **8181**

Any. Port:

In. Interface: **ether1**

Out. Interface:

In. Interface List:

Out. Interface List:


Packet Mark:

Connection Mark:

Routing Mark:

Routing Table:

Connection Type:

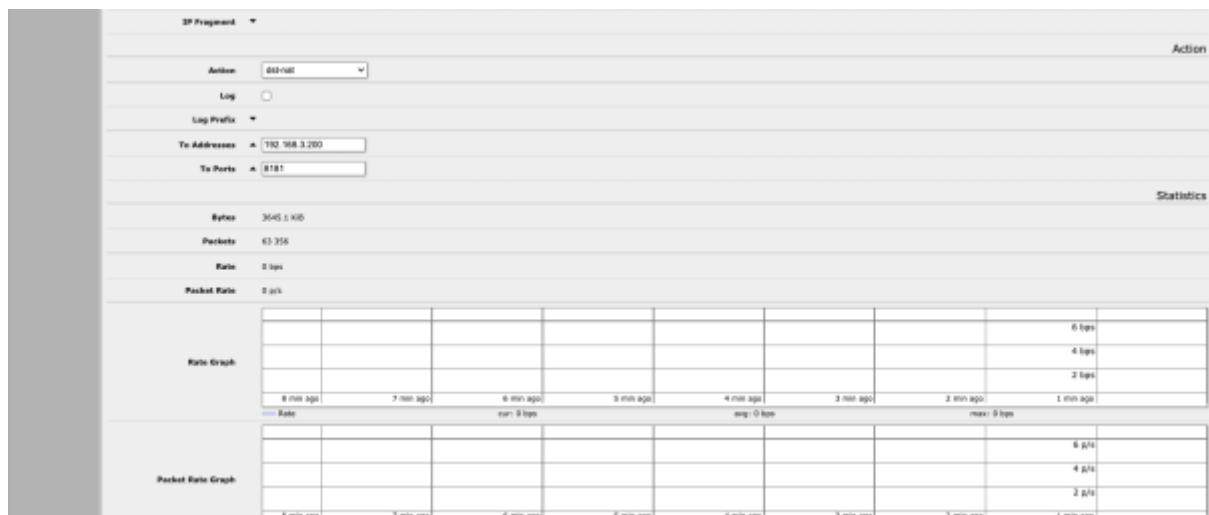

Domain re-direct

IP > DNS > Static button

- We can re-point ktm.msupply.org to our mac mini server : 192.168.3.200

DHCP Server

- IP > DHCP Server > Lease : We can lease IP address to a hardware

From:
<https://wiki.sussol.net/> - Sussol Internal Wiki

Permanent link:
https://wiki.sussol.net/doku.php/misc:hardware:sussol_hardware:mikrotik:hosting_internal_servers?rev=1743216892

Last update: 2025/03/29 02:54

